



**L<sup>DR</sup>**  
 SERIES  
**50**

**Valves for fixed installations**

**50mm for FK- 5.1.12 / HFC-227 ea gases**

**SPECIFICATIONS**


Product code	LDR50/25	LDR50/50	Product code
Discharge type	Total	Total	Discharge type
Working pressure	25 bar	42 bar	Working pressure
Orifice size	Ø 49 mm	Ø 49 mm	Orifice size
Inlet connection	3" male	3" male	Inlet connection
Outlet Connection	2 1/2" male	2 1/2" male	Outlet Connection
Burst disc pressure	50 bar	78 bar	Burst disc pressure
Valve Body	Brass	Brass	Valve Body
Temperature range	-20°C to +60°C	-20°C to +60°C	Temperature range

### ABF:A@E

- \* GdWJU' b'Yh
- \* GdWJU' Ci hYh
- \* ; U [Y
- \* ; U [Yk]h, ]bHY[ fUYXdfYggj fY'gk ]JW
- \* DfYggj fY'gk ]JW

### ORDERING (When ordering, please specify)

- \* Series number or attribution
- \* Type of gas
- \* Connections
- \* Burst disc pressure "P"
- \* Options

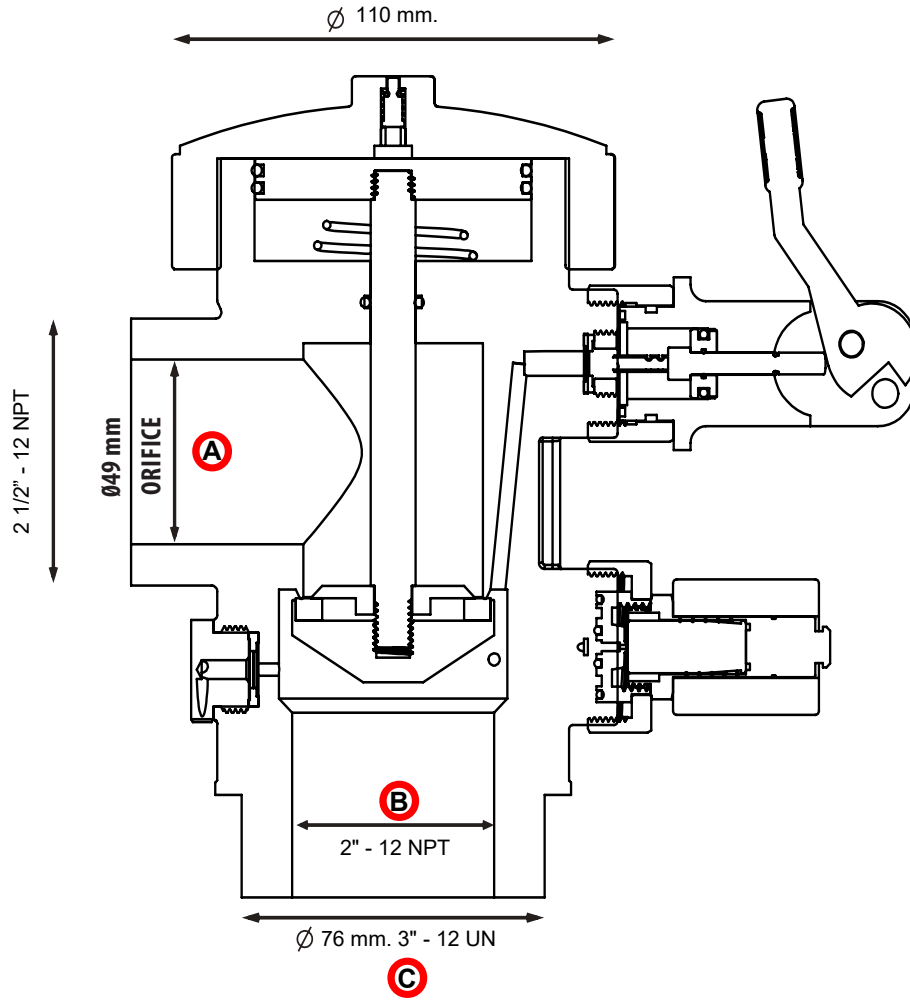

### TECNICAL SPECIFICATIONS

Working pressure P.Max	78 Bar
Valve Body	Brass
Inlet Connection	C = 3" - 12 UN
Outlet Connection	A = 2 1/2" - 12 NPT
Gauge	Has to be specified
Dip Tube Connection	B = 2" - 12 NPT