



L^{DR}
 SERIES
33

Valves for fixed installations

33 mm for FK- 5.1.12 / HFC-227 ea gases

SPECIFICATIONS


Product code	LDR33/25	LDR33/50	Product code
Discharge type	Total	Total	Discharge type
Working pressure	25 bar	42 bar	Working pressure
Orifice size	Ø 33 mm	Ø 33 mm	Orifice size
Inlet connection	2,5" male	2,5" male	Inlet connection
Outlet Connection	1" NPT male	1" NPT male	Outlet Connection
Burst disc pressure	50 bar	78 bar	Burst disc pressure
Valve Body	Brass	Brass	Valve Body
Temperature range	-20°C to +60°C	-20°C to +60°C	Temperature range

OPTIONS

* GdWJU' b'Yh
* GdWJU' Ci hYh
* ; U [Y
* ; U [Y k]h,]bHY[fUHX dFYggj fY'gk]JW
* DFYggj fY'gk]JW

ORDERING (When ordering, please specify)

* Series number or attribution
* Type of gas
* Connections
* Burst disc pressure "P"
* Options

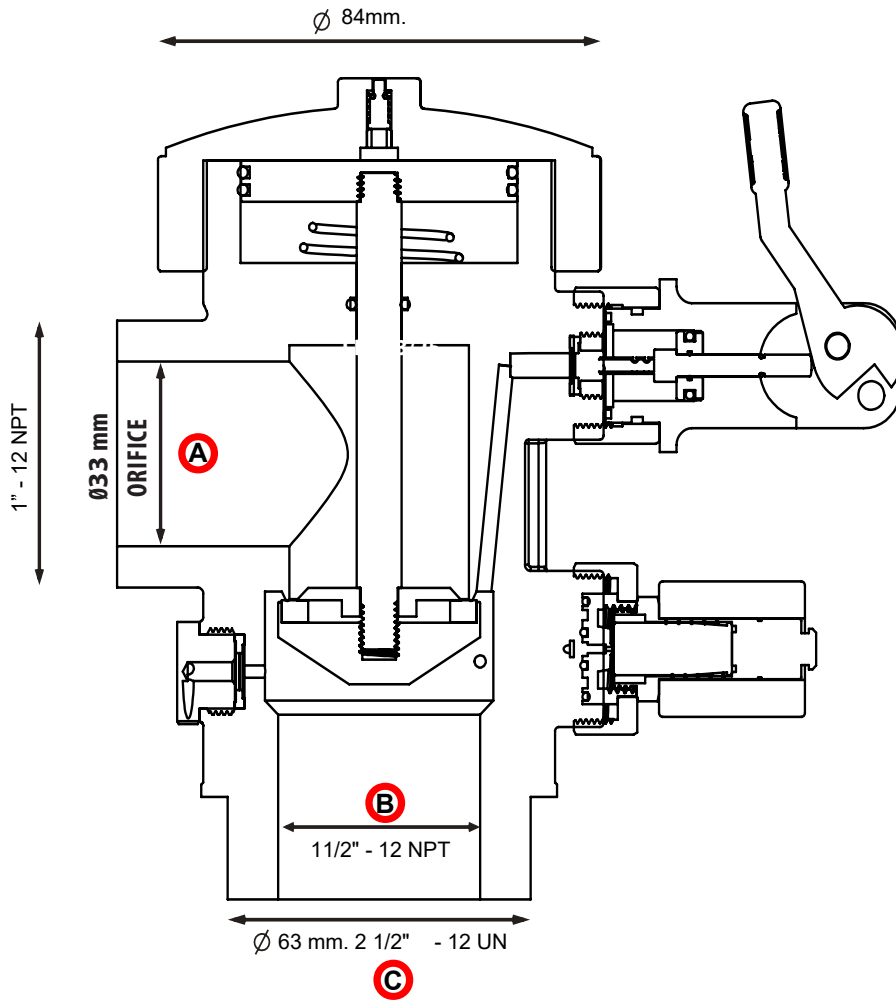

TECNICAL SPECIFICATIONS

Working pressure P.Max	78 Bar
Valve Body	Brass
Inlet Connection	C = 2 1/2" - 12 UN
Outlet Connection	A = 1" - 12 NPT
Gauge	Has to be specified
Dip Tube Connection	B = 1 1/2" - 12 NPT